

Equipment	Horizontal measuring system	
Model	ZCE5-H-80 with electronic register	
Performance characteristics		
Measured liquids	Liquid hydrocarbons, industrial oils, fatty acid esters, ethanol	
Static pressure	max	15 bar
Inlet pressure	max	10 bar
Liquid temperature	min / max	- 10°C / +90°C 14°F / +194°F
Working flow rate	min / max	8 m ³ /h - 133 L/min - 36 USGPM / 80 m ³ /h - 1333 L/min - 360 USGPM
Liquid viscosity	max	20 mm ² /s (MID) - 800 mm ² /s - at operating conditions
Accuracy	< +/- 0.15% of measured value	
Repeatability	< +/- 0.02% of measured value	
Pressure drop	See enclosed table	
Calibration report	On 3 points (8 m ³ /h, 40 m ³ /h, 80 m ³ /h)	
Description of the measuring system		
Components	1-Strainer Air eliminator – EC31 2-Positive displacement meter – ZC17-80 3-Multi-function valve with electromechanical control box – XAD37 4-Electronic register – Equalis S	
1-Strainer air eliminator – EC31		
Connection nominal size	DN 80 / 3"	
End connection style	Flanges ASA 150 RF	
Effective volume	22.75 L	
Materials	body / seal	Cast iron (EN 5.3201) / Viton, nitrile (option alcohols measurement)
Thermowell ports	Quantity 2, ½ " gas, plugged	
Drain port	1" ¼ gas, plugged	
Gas release head	Automatic gas release controlled by float and differential valve	
Gas release connection	¼ "	
Dry contact for gas detection (AC10)	REED contact controlled by float position	
Valve on gas release pipe	Ball valve (option)	
Filtering technology	Basket filter	
Filtering size	50 µm, 200 µm, 450 µm (selection depending on measured product)	
External coating	Acrylic-Epoxy coating RAL5010	
2-Positive Displacement meter - ZC17-80		
Connection nominal size	DN 80 / 3"	
End connection style	Flanges ASA 150 RF	
Displacement element type	Sliding vanes flowmeter	
Cyclic volume	2,27 L - 0,6 USG	
Body material	Ductile iron (EN 5.3201), Ni resist iron (EN-JL3011) (option)	
Cap/end cover material	Carbon steel (EN 1.0625) with protective coating	
Seal/O-ring material	Viton, Nitrile (option for alcohols measurement)	
Blades / Blades connection rods	Graphite / Stainless steel	
Rotor/ Bearings	Aluminum (EN AC-42100) / Stainless steel (EN 1.4301)	
Swing joint	Viton, Nitrile (option for alcohol), PTFE (option for low ambient temperature)	
Accuracy adjuster type	Calibration constants	
Temperature compensation type	Pt100	
External coating	Acrylic-Epoxy coating RAL5010	

SATAM sas**Headquarters & Sales Department**

Paris Nord 2 – Bâtiment Le Gauvain
47, allée des Impressionnistes – BP85012 – Villepinte
95931 Roissy CDG Cedex – France
Tel : +33 (0)1 48 63 02 11 – Fax: +33 (0)1 49 38 41 01
Email : sales@satam.eu

Manufacturing facility

Avenue de Verdun
14700 Falaise – France
Tel : +33 (0)2 31 41 41 41
Fax : +33 (0)2 31 40 75 61

Equipment	Horizontal measuring system		
Model	ZCE5-H-80 with electronic register		
4-Multi-function valve – XAD37 with electromechanical control box			
Operating principle	Piston operated by differential pressure with electromechanically controlled inlet circuit.		
Body material	Steel (EN 1.0625)		
Cylinder material	Aluminum (EN AC-42100)		
Piston material	Aluminum with lining (EN AW-7075)		
Retaining spring material	Stainless steel		
Decompression ball - Thermal relief valve	Calibrated at 0.4 bar		
Adjusting screw	For closing time adjustment		
Electrical control box - AC16	Drive shaft controlled by 2 electromagnets allowing operation in low flow rate and high flow rate.		
Electromagnets specifications	220VAC 50Hz, peak inrush intensity: 2A, holding intensity: 1A		
External coating	Acrylic-Epoxy coating RAL5010		
5-Register			
Register type	Electronic register		
Model	Equalis S		
Environmental			
Ambient working temperature	min / max	-25°C, -40°C (option) / +55°C	-13°F, -40°F (option) / +131°F
Storage temperature	min / max	-40°C / +80°C	-40°F / +176°F
Certification			
ATEX	II 2 G c T4 Gb		
European metrology	CE /MID Type examination certificate n°LNE-6184		
International metrology	OIMLR117-1, type compliance certificate n°LNE-24351		
Standards compliance	API, ASME, NATO. See note 1		

Note 1: Contact us for further information about standards compliance.

SATAM sas**Headquarters & Sales Department**

Paris Nord 2 – Bâtiment Le Gauvain
47, allée des Impressionnistes – BP85012 – Villepinte
95931 Roissy CDG Cedex – France
Tel : +33 (0)1 48 63 02 11 – Fax: +33 (0)1 49 38 41 01
Email : sales@satam.eu

Manufacturing facility


Avenue de Verdun
14700 Falaise – France
Tel : +33 (0)2 31 41 41 41
Fax : +33 (0)2 31 40 75 61

www.satam.eu

DS042-Rev00-07/17-Marketing Satam
Subject to modification without prior notice

Equipment	Horizontal measuring system
Model	ZCE5-H-80 with electronic register

Dimensions and weight

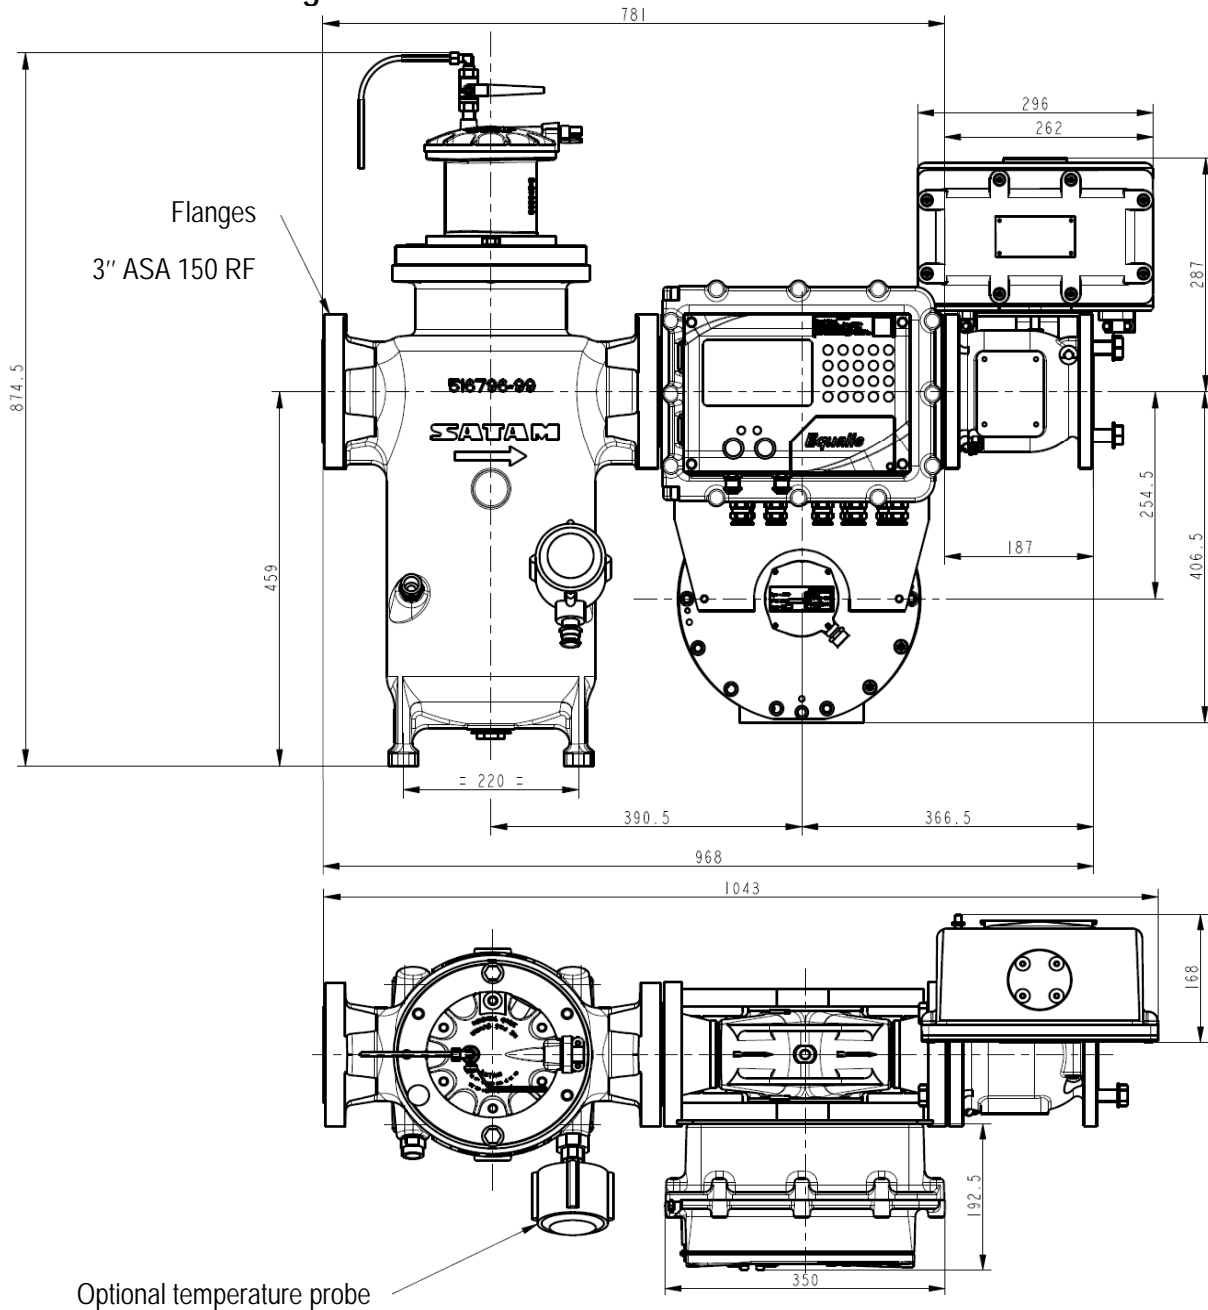

Weight: 173 kg

Weight is mentioned without electronic register. Please refer to Equalis S data sheet for information about weight of electronic register

SATAM sas

Headquarters & Sales Department

Paris Nord 2 – Bâtiment Le Gauvain
 47, allée des Impressionnistes – BP85012 – Villepinte
 95931 Roissy CDG Cedex – France
 Tel : +33 (0)1 48 63 02 11 – Fax: +33 (0)1 49 38 41 01
 Email : sales@satam.eu

Manufacturing facility

Avenue de Verdun
 14700 Falaise – France
 Tel : +33 (0)2 31 41 41 41
 Fax : +33 (0)2 31 40 75 61

Equipment	Horizontal measuring system
Model	ZCE5-H-80 with electronic register
<p>Pressure drop chart</p> <p>Pressure drop (bar) ZCE5-H 80 Pressure drop (jet fuel, 20°C)</p> <p>Flow rate (m3/h)</p>	

SATAM sas

Headquarters & Sales Department

Paris Nord 2 – Bâtiment Le Gauguin
47, allée des Impressionnistes – BP85012 – Villepinte
95931 Roissy CDG Cedex – France
Tel : +33 (0)1 48 63 02 11 – Fax: +33 (0)1 49 38 41 01
Email : sales@satam.eu

Manufacturing facility

Avenue de Verdun
14700 Falaise – France
Tel : +33 (0)2 31 41 41 41
Fax : +33 (0)2 31 40 75 61

www.satam.eu

DS042-Rev00-07/17-Marketing Satam
Subject to modification without prior notice